



Created With Love


Servo-electric Punching Machine

TP BETA

(Technical specifications)



“C” FRAME:

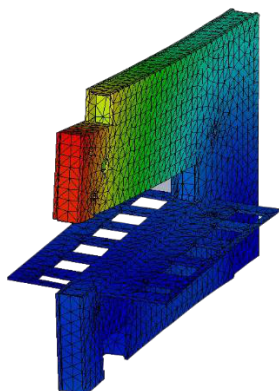

Electro-welded monolithic structure subjected to heat treatment for normalisation, which enables all the tensions generated by welding to be spread, thus obtaining homogeneous rigidity and guaranteeing maximum stability and precision in machining.


The structure of TECHNOLOGY punching machines is supplied with 15 YEARS WARRANTY.

It allows front and / or side loading, as well as the processing of non-standard sizes thanks to the possibility to overturn and reposition the sheet.




X-Y AXES MOVING SYSTEM:

It's realized with two different technologies: X axis with rack and pinion and Y axis with ball screw, to guarantee the maximum sheet stability and precision in processing. The axes have the possibility to position themselves in negative up to -40 mm.

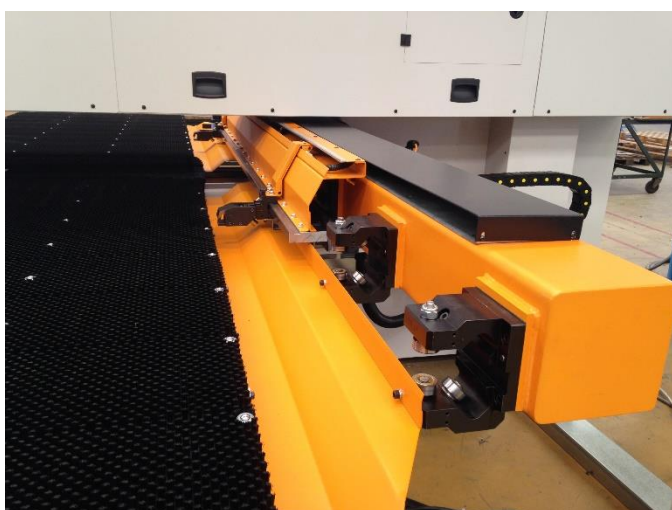

X-axis

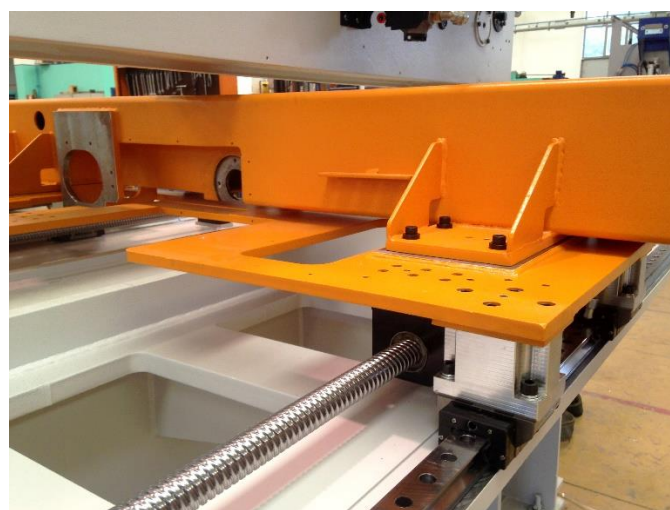

Y-axis

SERVO-ELECTRIC PUNCHING UNIT:


The movement of the punching unit is generated by a CNC-controlled FANUC brushless servo-electric motor.

- 25 Ton
- 800 stroke/min

This system allows lower consumption, high productivity, acceleration control combined with reduced maintenance.

The DualCam system allows high-frequency machining without overheating problems.

DualCam allows the machine's servo-electric unit to work in two modes:

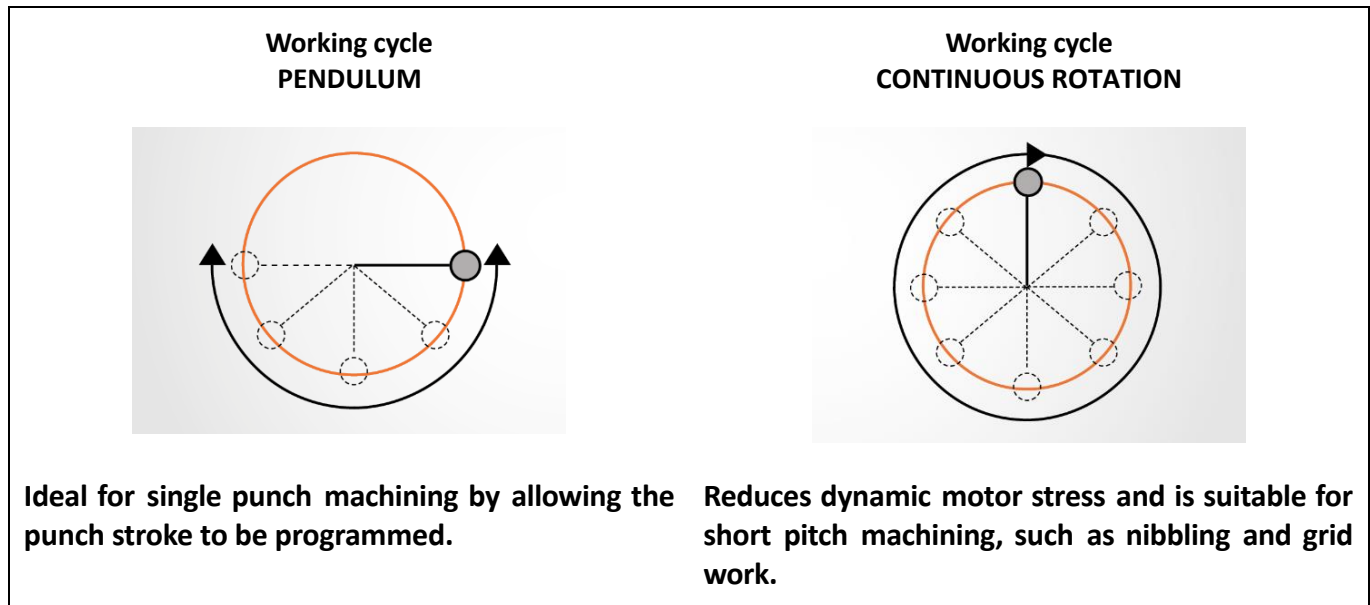

Automatic tool sharpening compensation: increases tool life by automatically managing the penetration depth for each individual station.

Noiseless punching: the SoftPunch function reduces the noise level of the machining up to 50% based on the type and thickness of the material.

Stand-by mode: in this phase the engines stop, reducing energy consumption to 0.4 Kw; moreover, a regenerative system recovers energy during the braking phase of the engine.

HORIZONTAL TOOL CHANGE SYSTEM:



The Clever Turret tool changer revolutionises the concept of the traditional turret system, it makes the work area more visible and accessible.

It is developed horizontally with 5 stations all auto-index and customisable.

Each station can be equipped with single or multi-tools.

The single tool change takes place in 3 seconds, tool change within the Multi-tools in 0.5 seconds.




Setting up individual stations is done in just 12 seconds, simply and intuitively.

Tool holders are required to house the tools in the machine.



FULL AUTO-INDEX SYSTEM:

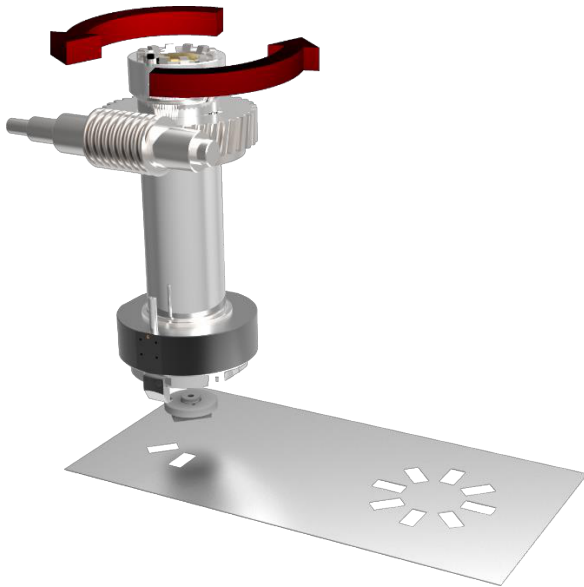

System fully integrated inside the punching unit and managed by the CNC, allows to orient any type of tool, single or contained in the Multi-tools, from 0° to 360° with minimum programmable steps of 0.01° .

COMPATIBLE TOOLS:


The TP Beta punch press is compatible with TECHNOLOGY style tools and all TRUMPF style tools.

MULTI-TOOLS:

The punching unit can be fitted with Multi-tools, i.e. special containers that can house 4, 5 or 10 tools of different shapes and sizes in a single station, thus considerably reducing production times and tool purchasing costs. All the tools inside the Multi-tool benefit from auto-index technology, which allows each tool to be oriented from 0 to 360° with an accuracy of 0.01° .



Multi-tool
with 4 auto-index tools




Multi-tool
with 5 auto-index tools



Multi-tool
with 10 auto-index tools

SHEET LOCKING CLAMPS:

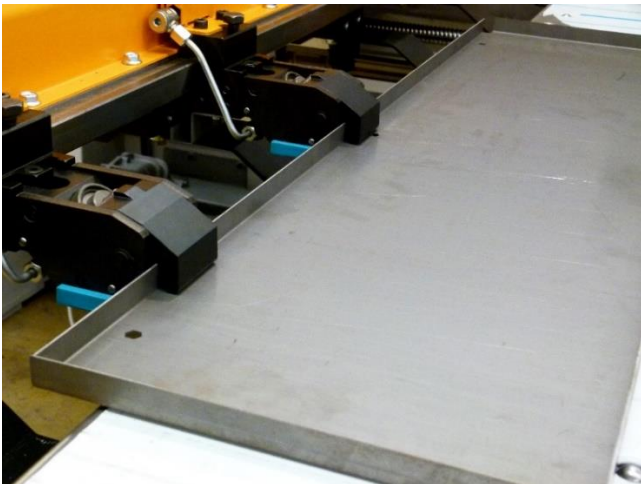

The clamping force is adjustable (maximum force 15 KN each) depending on the material and thickness to be processed. They can block sheets with already bent edges up to a maximum height of 22 mm.

FANUC MOTORS, DRIVES AND CNC:



The electronic management of the machine is entrusted in addition to the numerical control also to the drives and motors FANUC, world leader in the sector, which guarantees the availability of spare parts for 25 years through the widespread assistance network.

CONSOLE WITH 18.5" TOUCH-SCREEN MONITOR:



The machine console is equipped with a large 18.5" monitor with touch-screen system to facilitate operator interaction with the machine.

The PC has the following specifications:

- Windows 10 operating system
- Processor: i5 5200U
- 4GB RAM
- 128GB SSD
- 2 USB 3.0 ports | 2 USB 2.0 ports
- 2 LAN ports

TECNOCONTROL HMI :

Interface created by TECHNOLOGY to be used with the touch-screen that leads to simplify the use of the machine with pages dedicated to the individual functions and a description of the commands that doesn't require the use of codes.

The TECNOCONTROL HMI allows the punching machine to be used in three modes:


- **Manual:** Punching and moving the axes is done manually, using the pedal and joystick on the console..
- **Semi-automatic:** automatic axis movement (based on programming) and manual punching using the foot pedal.
- **Automatic:** Once the program has been created with TECNOCAM graphic software, punching and movement of the axes takes place automatically..

The interface also provides a user-friendly panel to keep various useful information available at all times with dedicated links:

- Punching machine tool catalogue;
- Online shop for purchasing spare parts or tools;
- Automatic calculators: Punching force calculation, Die clearance calculation and Sheet metal weight calculation;
- Operator's manual for machine use;
- TECHNOLOGY website
- YouTube channel

AUTOMATIC REPOSITIONING:

Possibility of processing extra-large sheet formats by repositioning the sheets along the X-axis with the machine head. The number of repositionings is potentially infinite in both positive and negative directions.

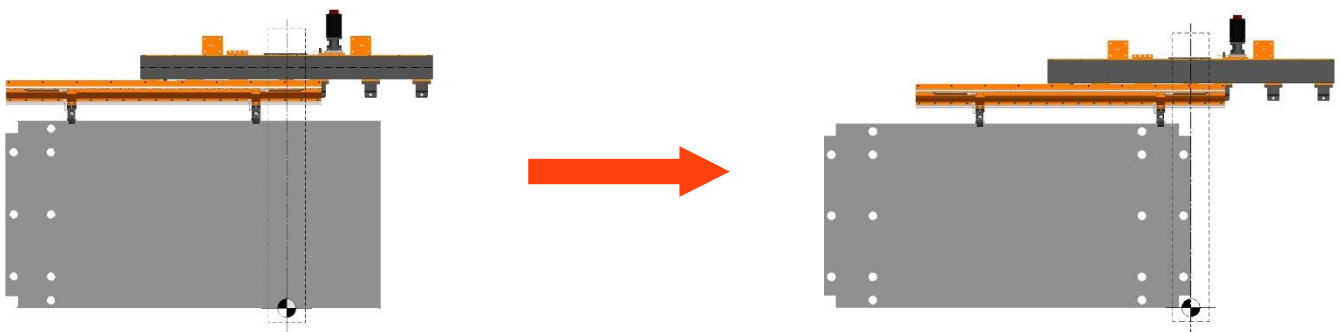


SHEET METAL SUPPORT TABLES:




In brushes and balls, they are mobile and slide on the Y axis by means of dovetail guides mounted on special supports.

CENTRALISED PNEUMATIC SYSTEM:

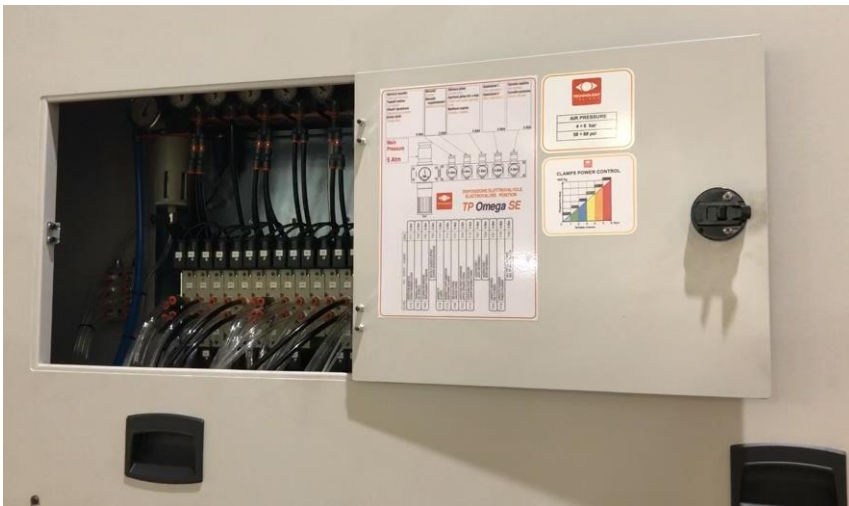

The machine's pneumatic system, which is used to operate the various services of the punching machine, is centralised and easily accessible through a practical door on the left-hand side of the machine. This allows simple and immediate intervention in case of maintenance.

GROUNDED ELECTRICAL CABINET:

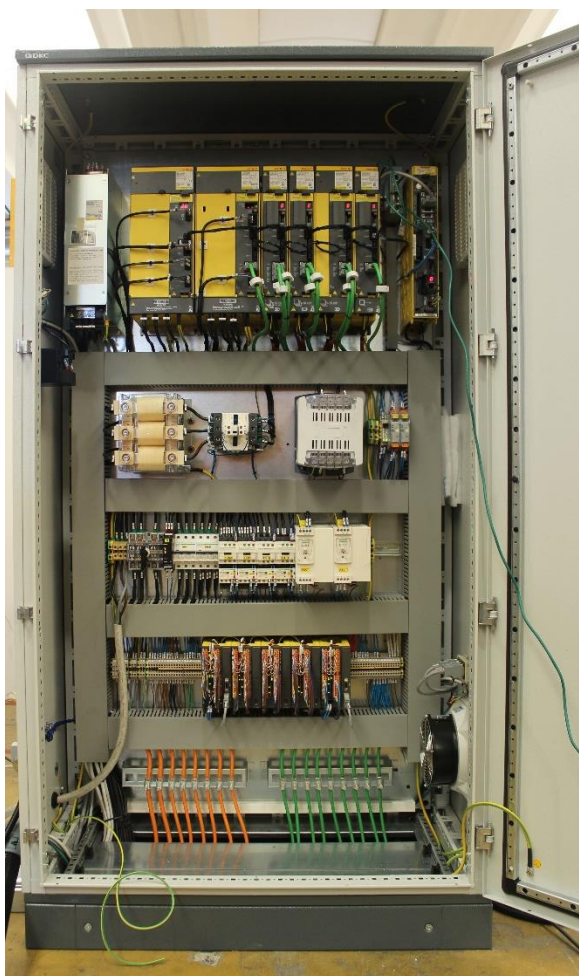

The electrical cabinet is positioned on the ground to prevent stress on the electronic components due to the vibrations generated by the punching machine during the machining phases.

It is equipped with a cooling system and composed only of high quality materials, produced by suppliers such as Schneider, Legrand and Baumer.

MANUALS:

The machine is supplied with operation and maintenance manuals.



Created With Love

TECHNICAL SPECIFICATIONS:

TP BETA				
Models:	U.M	258	266	268
Working range	mm	1250 x 2000	1500 x 1500	1500 x 2000
With one repositioning	mm	1250 x 4000	1500 x 3000	1500 x 4000
Max. punching force	Ton	25		
Max. workable thickness	mm	6,5		
Max. sheet weight	Kg	200		
Y-axis stroke	mm	-40 / 1270	-40 / 1550	-40 / 1550
X axis stroke	mm	-40 / 2040	-40 / 1550	-40 / 2040
X axis stroke upgrade	mm	-40 / 2250 -40 / 2500	-	-
Simultaneous speed	m/min	95		
Max. punching frequency	colpi/min	800 colpi/min passo 1mm 480 colpi/min passo 20mm 380 colpi/min passo 25,4mm		
Number of stations	N°	5 auto-index		
Max. number of auto-index tools	N°	From 5 to 50* Auto-index		
Tool change time	sec	3		
Tool change time with Multitool	sec	0,5		
Positioning accuracy	mm	+/- 0,05		
Punching accuracy	mm	+/- 0,1		
Minimum C-axis rotation increment (auto-index)	°	0,01		
Absolute axes	n°	8		
Motor absorption in stand-by	Kw	0,4		
Electrical absorption during operation	Kw	8		
Weight	Kg	9750	10500	10750

* using the Multi-tool

OVERALL DIMENSIONS

Models:	U.M	258	266	268
Width	mm	4350	4350	5350
Depth	mm	3900	4400	4400
Height	mm	2430	2430	2430

OPTIONALS:

Safety photocells according to CE standards (REQUIRED IN EU COUNTRIES)
Necessary to create a safety zone around the machine during work operations

Punch missed extraction sensor (RECOMMENDED)
Intervenes to block the machine if the punch is not extracted from the sheet metal

Die scrap suction system with hatch (RECOMMENDED)
Ensures correct cleaning of the die of the scraps produced during processing.
(Recommended for high frequency punching operations on thin thicknesses (e.g. grids))

X-axis extension with a length of 2250mm

X-axis extension with a length of 2500mm with moving table upgrade

Additional sheet metal clamp
Ensures more stability with thicker sheet

Stainless steel and balls sheet support tables
(Recommended for machining thicknesses of more than 3mm)

Automatic lubrication system for the working area
CNC-controlled oil nebulizer that keeps the sheet metal and tools lubricated during processing.
(Ensures longer tool life and facilitates the punching of sheets over 3 mm thick)

Additional sheet metal support tables for processing 1250x2500mm formats
Required to support sheets larger than the working area of the machine.

Additional sheet metal support tables for processing 1500x3000mm formats
Required to support sheets larger than the working area of the machine.

21-inch touch monitor

Special CNC functions
A system that allows to perform a number of special functions (wheel tools, engraving and threading)

Electropump lubrication system for threading tools and rods
(Necessary for internal lubrication of the threading tool or nibbler type TECHNOLOGY)

Tele Assistance
(Necessary to enable remote machine servicing)

Industry 4.0 Ready
(Necessary to enable functionality suitable for Industry 4.0 systems)
